




ULTRATEK
Safety Harness

STANDARD : CONFORMING TO EN 361:2002, EN 813:2008,
EN 358:2018, IS 3521 (Part 1) : 2021



INDUSTRY	IDEAL APPLICATION
Construction	Rescue
Telecom	Rope Access
Transmission	Ladder Climbing
-	Work Positioning
-	Fall Arrest

SPECIAL FEATURES

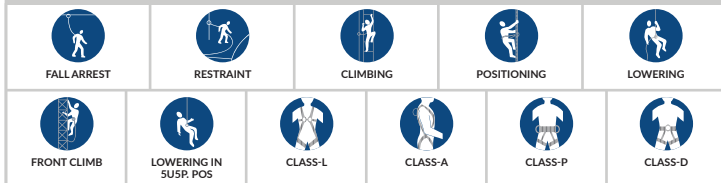


WEBBING MATERIAL	WEBBING WIDTH
AZO free dyed synthetic Polyester	44 +/- 1 mm

WEBBING BREAKING STRENGTH
22kN (Min)

STITCH THREADS MATERIAL	STITCH THREADS COLOUR
High-tenacity virgin multifilament polyester	White

METAL COMPONENTS	HARNES COLOUR	WEIGHT
High quality alloy steel, zinc plated, free from any sharp edges	Black	2200 grams

TEST COMPLIANCE - STATIC STRENGTH
Tested at each attachment element with a force of 15 KN applied for 3 min.

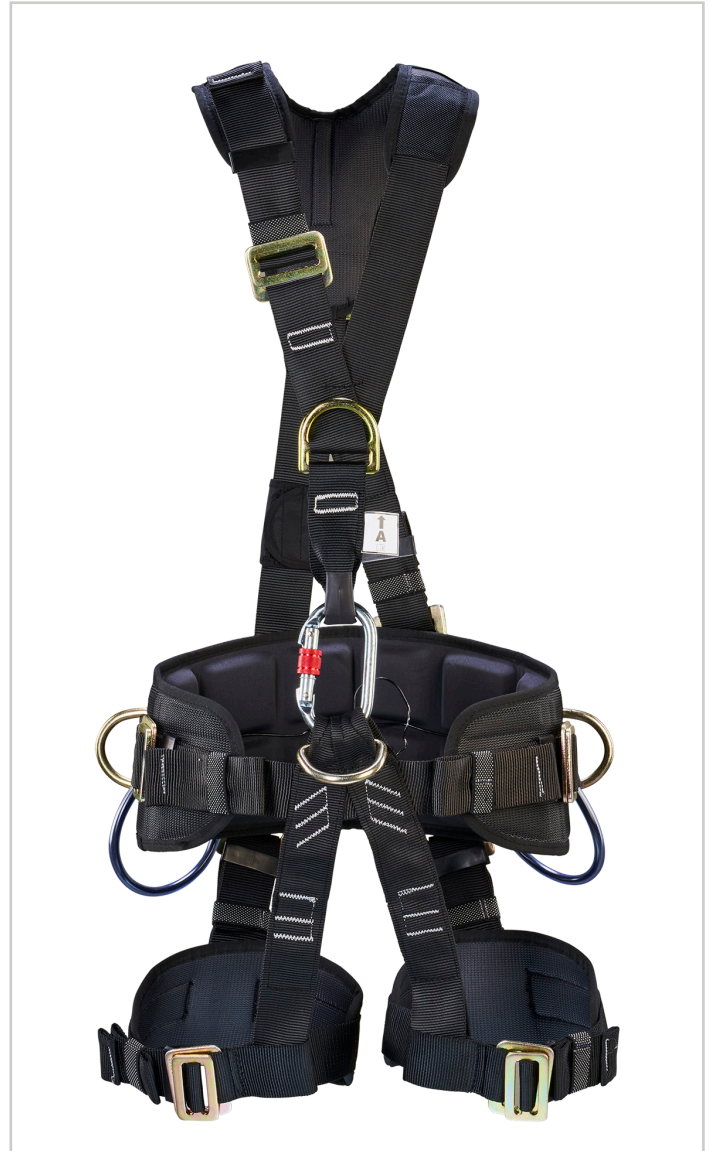

TEST COMPLIANCE - DYNAMIC STRENGTH
When tested at each Fall Arrest Attachment element with a torso dummy of 100 Kg mass, the full body harness withstands drop tests with a free fall distance of 4 mt.

Udyogi



FEATURES	MARKINGS
One dorsal D-ring for fall arrest	Manufacturers Logo, details & mailing address
One sternal D-ring on chest for fall arrest	Address Model No., Batch No., Serial No.
Two lateral D-rings on waist for work positioning	Year of Manufacture
One Ventral D-ring at waist level for rope access	Material
Comfortable and cushioned padding on Waist for comfort during long duration use	Approval & IS marking
Y-shaped padding and quick adjustment buckle on thighs make it comfortable, simple and easy for donning & doffing	Instruction Pictogram
Fully adjustable waist pad, thigh pads and back strap	STORAGE
Facilitate vertical and horizontal movements	Store the harness in a dry area away from ultraviolet rays.
CLEANING	Do not store in direct/ high heat or sunlight as this may distort the Colour.
Use Clean piece of cloth to wipe the dust	Can be stored and transported in their original cartons to avoid corrosion due to atmospheric moisture, excessive heat or cold.
PACKING	5 pieces per carton



Udyogi