




**ULTRATEK AS**  
Anti-static Safety Harness

STANDARD : Conforming to EN 361:2002, EN 813:2008,  
EN 358:2018, IS 3521 (Part 1) : 2021



INDUSTRY	IDEAL APPLICATIONS
Construction	Rescue
Telecom	Rope Access
Transmission	Work Positioning
Oil & Gas	Confined Space Entry
-	Fall Arrest

**SPECIAL FEATURES**

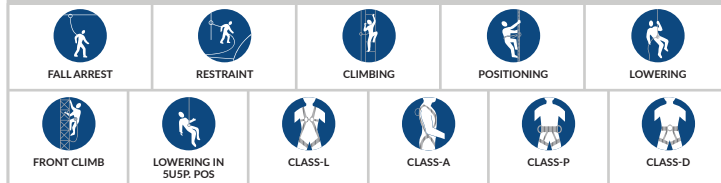

WEBBING MATERIAL	WEBBING WIDTH
AZO free dyed anti-static material	44 +/- 1 mm

WEBBING BREAKING STRENGTH
22kN (Min)

STITCH THREADS MATERIAL	STITCH THREADS COLOUR
High-tenacity virgin multifilament polyester	White

METAL COMPONENTS	HARNES COLOUR	WEIGHT
High quality alloy steel, zinc plated, free from any sharp edges	Green & Orange	2200 grams

TEST COMPLIANCE - STATIC STRENGTH
Tested at each attachment element with a force of 15 KN applied for 3 min.



TEST COMPLIANCE - DYNAMIC STRENGTH
When tested at each Fall Arrest Attachment element with a torso dummy of 100 Kg mass, the full body harness withstands drop tests with a free fall distance of 4 mtr.

**Udyogi**



FEATURES	MARKINGS
One dorsal D-ring for fall arrest	Manufacturers Logo, details & mailing address
One sternal D-ring on chest for fall arrest	Model No., Batch No., Serial No.
Two lateral D-rings on waist for work positioning	Year of Manufacture
One Ventral D-ring at waist level for rope access	Material
Comfortable and cushioned padding on Waist for comfort during long duration use	CE Approval, ATEX & IS marking
Y-shaped padding and buckle on shoulder make it comfortable, simple, fast and easy access and donning	Instruction Pictogram
Fully adjustable waist pad, thigh pads and back strap	
CLEANING	STORAGE
Use Clean piece of cloth to wipe the dust	Store the harness in a dry area away from ultraviolet rays. Do not store in direct/ high heat or sunlight as this may distort the Colour. Can be stored and transported in their original cartons to avoid corrosion due to atmospheric moisture, excessive heat or cold.
PACKING	
5 pieces per carton	



**Udyogi**