



BRAIDED ROPE

STANDARD : CONFORMING TO EN 1891 to EN 567

INDUSTRY	IDEAL APPLICATIONS
Construction	Work at Height
Telecommunication	
Road & Bridge Concs	Fall Arrest
Transmission	

SPECIAL FEATURES



FALL ARREST



STRONG



NOT DAMAGE IN SHARPE EDGE

MECHANICAL CHARACTERISTICS

Rope Material - Polyester

Rope Breaking Strength 38 Kn

Minimum Breaking Strength -
15 kN (for 10.5mm), 22kN (for 14mm)

Rope Dia - Ø 10.5 mm & Ø 14 mm

Temp. Range - -30°C to 50°C

FEATURES

Heavy duty rope with low elongation & high static strength

Intended primarily for Work at Height , Confined Space
Job and Rescue


Standard: Conforms to EN 1891 to EN 567

STORAGE

Store braided rope in a dry area away from
ultra violet rays & moisture

Do not store in direct/ high heat or sunlight as
this may distort the Colour

Can be stored and transported in their original cartons
to avoid corrosion due to atmospheric moisture,
excessive heat or cold

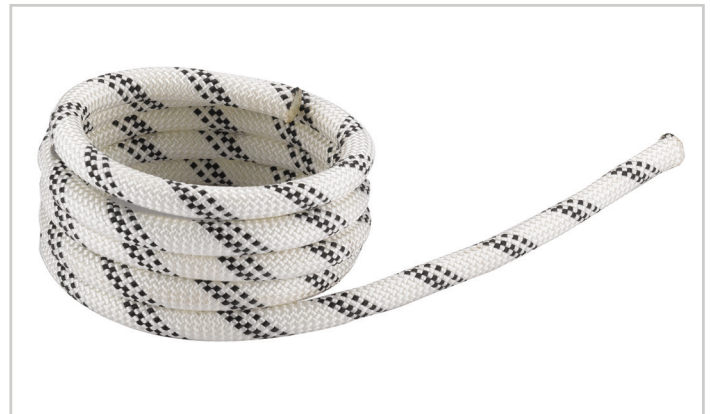

AVAILABLE LENGTH

Rope Dia - Ø 10.5 mm mm – 60, 70, 100, 150, 200 mtrs

Rope Dia - Ø 14 mm – 30, 50, 100, 150, 200 mtrs

TEST COMPLIANCE - STATIC STRENGTH

When subjected to a fall with a rigid mass of 100 kg.,
the braking force is less than 6 kN

MARKINGS

Manufacturers Logo, details & mailing address

Model No., Batch No., Serial No.

Year of Manufacturing

Material

Approvals & CE

CLEANING

Use clean piece of cloth
to wipe the dust

PACKING

As per customer's
requirement