



UKO1 LITE
Safety Harness

STANDARD: CONFORMING TO EN 361:2002 CE

INDUSTRY	IDEAL APPLICATIONS
Construction	Working at Height
-	Fall Arrest
-	Ladder Climbing

SPECIAL FEATURES



FALL ARREST



CLIMBING



CLASS-A




CLASS-L

WEBBING MATERIAL	WEBBING WIDTH
Polyester	44 +/- 1 mm

WEBBING BREAKING STRENGTH
25kN

STITCH THREADS MATERIAL	STITCH THREADS COLOUR
High tenacity virgin multifilament polyester	White

METAL COMPONENTS	HARNESS COLOUR	WEIGHT
High Strength Aluminium hardware for better durability. Free from sharp edges.	Orange & Black with reflective liner	850 grams

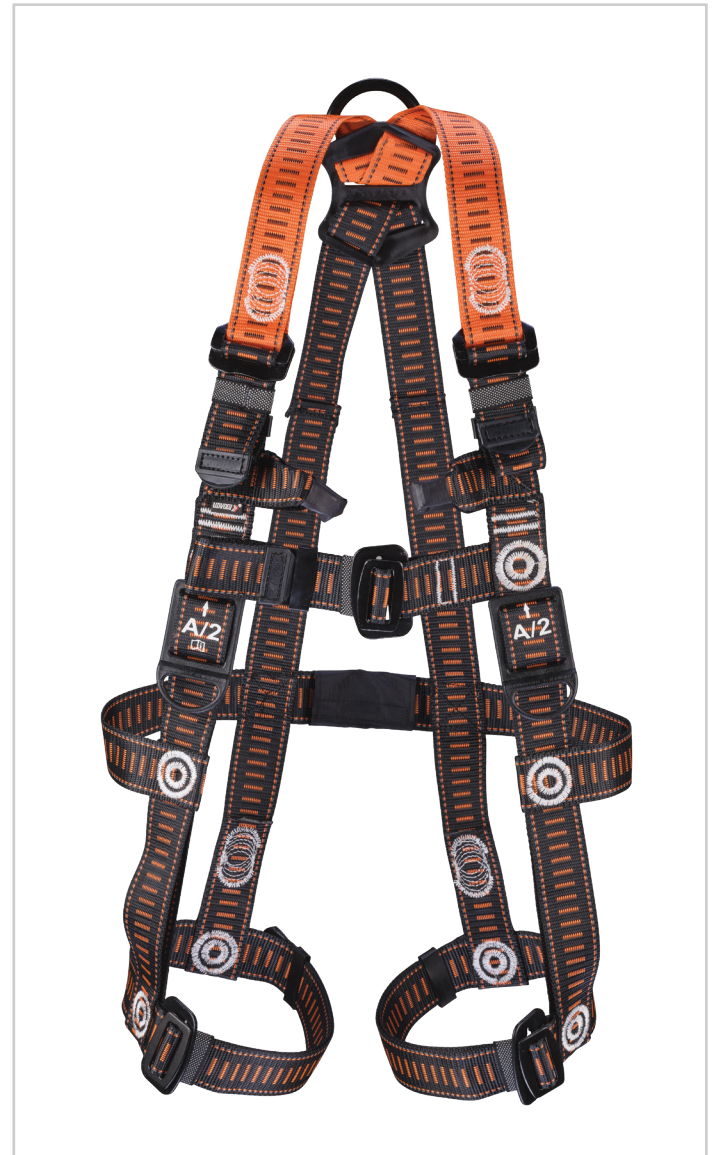

TEST COMPLIANCE - Static Strength

Tested at each attachment element with a force of 15 KN applied for 3 min.

TEST COMPLIANCE - Dynamic Strength

When tested at each Fall Arrest Attachment element with a torso dummy of 100 Kg mass, the full body harness withstands drop tests with a free fall distance of 4 mtr

Udyogi



FEATURES

- One dorsal D-ring for fall arrest
- Two textile chest attachment loop
- Size adjustment straps only at chest and thighs
- Elasticated web keeper
- Ideally positioned sit-strap for extended comfort
- Ergonomic horizontal H-shaped harness
- High strength abrasion resistant webbing
- Aluminium buckles for better durability
- Lanyard parking attachments
- Inspection label with QR scanning

MARKINGS

- Manufacturers Logo, details & mailing address
- Model No., Batch No., Serial No.
- Year of Manufacture
- Material
- Approval & IS marking

STORAGE

- Store the harness in a dry area away from ultraviolet rays.
- Do not store in direct/ high heat or sunlight as this may distort the colour.
- Can be stored and transported in their original cartons to avoid corrosion due to atmospheric moisture, excessive heat or cold.

CLEANING

- Use Clean piece of cloth to wipe the dust

PACKING

- 10 pieces per carton