





INDUSTRY	IDEAL APPLICATIONS
Construction	Working at Height
-	Fall Arrest
-	Ladder Climbing

SPECIAL FEATURES










WEBBING MATERIAL	WEBBING WIDTH
Polyester	44 +/- 1 mm

WEBBING BREAKING STRENGTH

25kN

STITCH THREADS MATERIAL	STITCH THREADS COLOUR
High tenacity virgin multifilament polyester	White

METAL COMPONENTS	HARNESS COLOUR	WEIGHT
High Strength Aluminium hardware for better durability. Free from sharp edges.	Orange & Black with reflective liner	850 grams

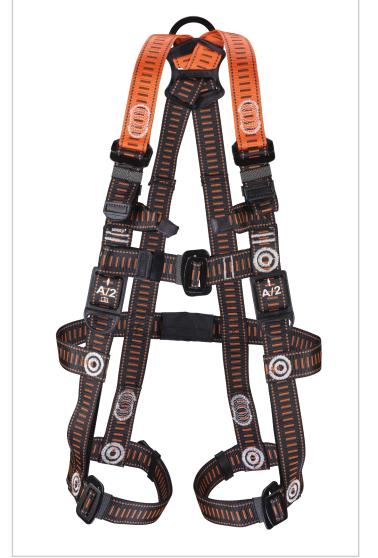

TEST COMPLIANCE - Static Strength

Tested at each attachment element with a force of 15 KN applied for 3 min.

TEST COMPLIANCE - Dynamic Strength

When tested at each Fall Arrest Attachment element with a torso dummy of 100 Kg mass, the full body harness withstands drop tests with a free fall distance of 4 mtr

Udyogi

294, B. B. Ganguly Street, 2nd Floor, Kolkata - 700 012

E-mail: info@udyogi.net

Website: www.udyogisafety.com

Tel.: +91 33 2225 1470/71/72





FEATURES	
One dorsal D-ring for fall arrest	
Two textile chest attachment loop	
Size adjustment straps only at chest and thighs	
Elasticated web keeper	
Ideally positioned sit-strap for extended comfort	
Ergonomic horizontal H-shaped harness	
High strength abrasion resistant webbing	
Aluminium buckles for better durability	
Lanyard parking attachments	
Inspection label with QR scanning	
Conforms to EN361:2002	

MARKINGS		
Manufacturers Logo, details & mailing address		
Model No., Batch No., Serial No.		
Year of Manufacture		
Material		
Approval & IS marking		

STORAGE

Store the harness in a dry area away from ultraviolet rays.

Do not store in direct/ high heat or sunlight as this may distort the colour.

Can be stored and transported in their original cartons to avoid corrosion due to atmospheric moisture, excessive heat or cold.

CLEANING

Use Clean piece of cloth to wipe the dust

PACKING

10 pieces per carton

E-mail : info@udyogi.net Website : www.udyogisafety.com Tel.: +91 33 2225 1470/71/72