



VIDYUT-UB102 DE
Safety Harness

STANDARD : CONFORMING TO EN 361:2002, IS 3521(Part 1): 2021  

INDUSTRY	IDEAL APPLICATIONS
Power	General Working at height
Pharmaceutical	Fall Arrest
Glass line reactors	Ladder Climbing

SPECIAL FEATURES




WEBBING MATERIAL	WEBBING WIDTH
AZO free dyed synthetic Polyester	44 +/- 1 mm

WEBBING BREAKING STRENGTH
23kN (Min)

STITCH THREADS MATERIAL	STITCH THREADS COLOUR
High-tenacity virgin multifilament polyester	White

NON-METAL COMPONENTS	HARNESS COLOUR
All harness are electrically insulated for 9kV dielectric resistance as per ANSI Z359.12-09	Red & Black

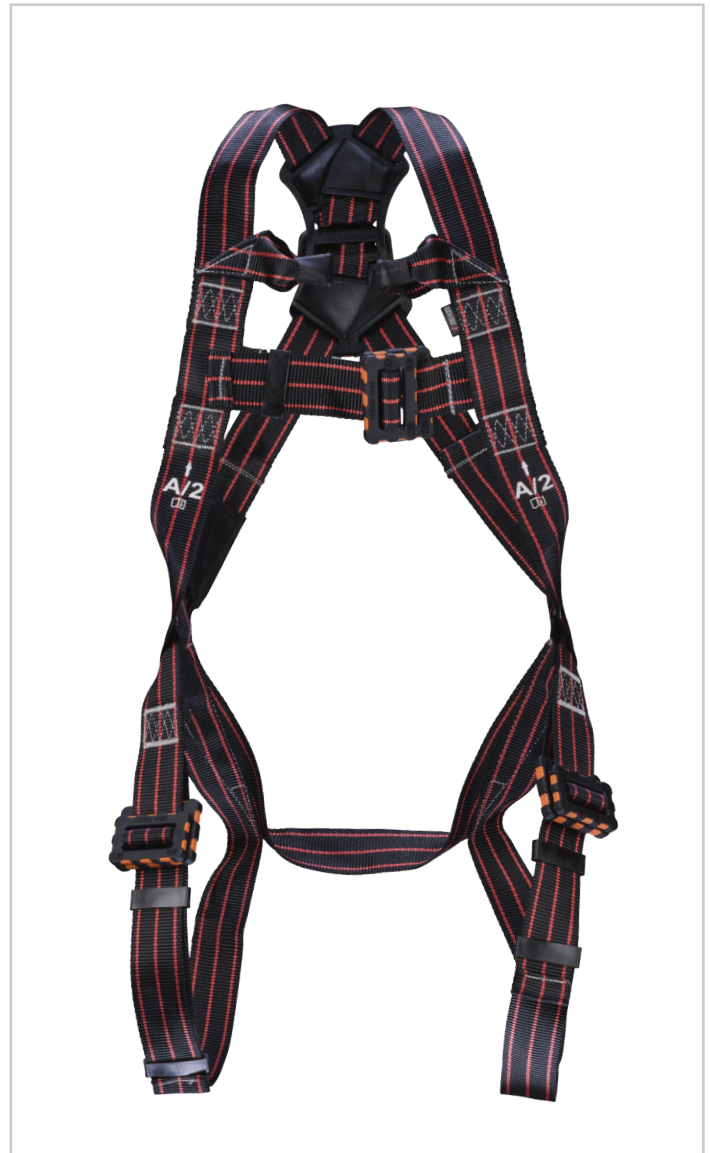

TEST COMPLIANCE - Static Strength
Tested at each attachment element with a force of 15 KN applied for 3 min.

TEST COMPLIANCE - Dynamic Strength
When tested at each Fall Arrest Attachment element with a torso dummy of 100 Kg mass, the full body harness withstands drop tests with a free fall distance of 4 mtr.

Udyogi



FEATURES

One dorsal D-ring for fall arrest
Two textile loop sternal attachment on chest for fall arrest
Fully adjustable chest and thigh strap
Ideally positioned sit-strap for extended comfort
Insulation coating makes it ideal for any electricity related application and while working in Glass line reactors

CLEANING

Use Clean piece of cloth to wipe the dust

PACKING	WEIGHT
10 pieces per carton	1020 grams

MARKINGS

Manufacturers Logo, details & mailing address
Model No., Batch No., Serial No.
Year of Manufacture
Material
Approval IS & CE marking
Instruction Pictogram

STORAGE

Store the harness in a dry area away from ultraviolet rays.
Do not store in direct/ high heat or sunlight as this may distort the Colour.
Can be stored and transported in their original cartons to avoid corrosion due to atmospheric moisture, excessive heat or cold.