















TRIVAGO
Safety Harness

STANDARD : CONFORMING TO EN 361:2002, EN1497:2007, EN813:2008, EN358:2018, IS 3521:Part 1:2021  

INDUSTRY	IDEAL APPLICATIONS
Telecom	Rescue
Transmission	Rope Access
Pharmaceuticals	Ladder Climbing
Chemicals	Work Positioning
Heavy Engineering	Fall Arrest

SPECIAL FEATURES

 LIGHT WEIGHT	 FALL ARREST	 RESTRAINT	 CLIMBING	 POSITIONING	 LOWERING
 FRONT CLIMB	 RESCUE	 CLASS-L	 CLASS-A	 CLASS-P	 CLASS-D


WEBBING MATERIAL	WEBBING WIDTH
AZO free dyed synthetic Polyester	44 +/- 1 mm

WEBBING BREAKING STRENGTH
25kN (Min)

STITCH THREADS MATERIAL	STITCH THREADS COLOUR
High-tenacity virgin multifilament polyester	White

METAL COMPONENTS	HARNESS COLOUR	WEIGHT
High quality Aluminum Quick Buckles	Black	2300 grams

TEST COMPLIANCE - Static Strength
Tested at each attachment element with a force of 15 KN applied for 3 min.

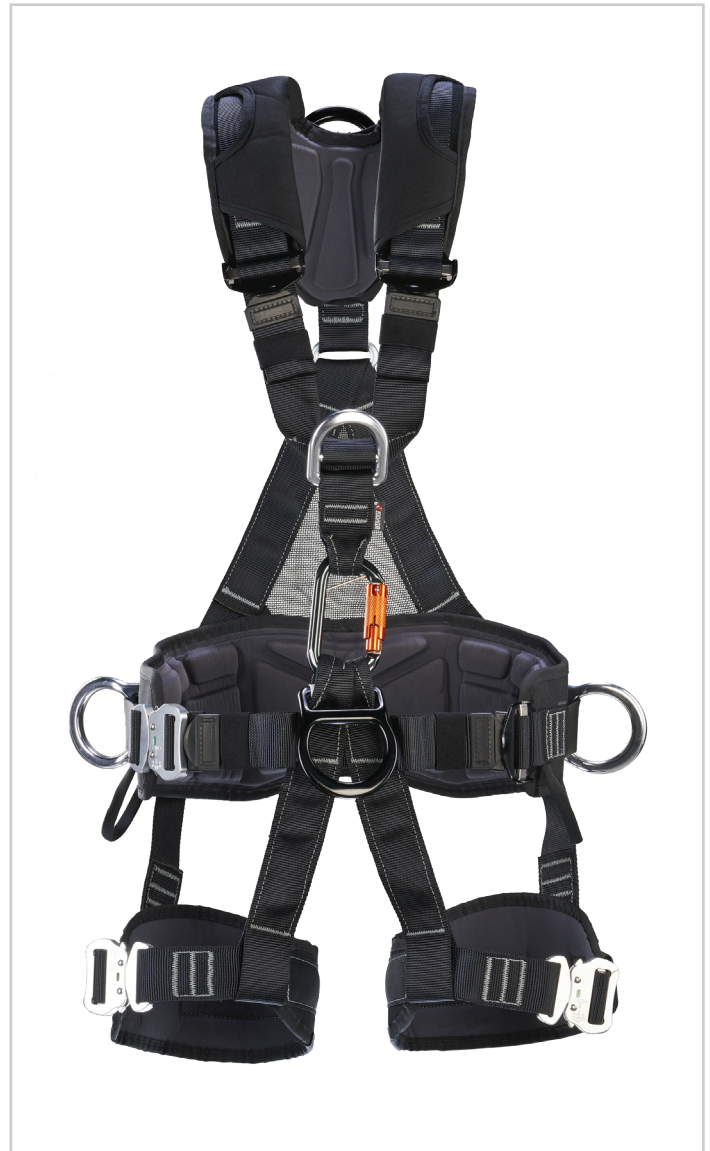

TEST COMPLIANCE - Dynamic Strength
When tested at each Fall Arrest Attachment element with a torso dummy of 100 Kg mass, the full body harness withstands drop tests with a free fall distance of 4 mtr.



FEATURES

- One dorsal D-ring for fall arrest
- One sternal D-ring on chest for fall arrest
- Two lateral D-rings on waist for work positioning
- One Ventral D-ring at waist level for rope access
- Comfortable Waist pad with memory foam on waist, thighs and Shoulder, ergonomically designed for better load distribution
- Light Weight aluminum Quick buckles on Waist, thighs and shoulder make it robust, simple, fast and easy access and donning
- Colour indicator on Quick Buckles to accurately lock the harness and check it again
- Shoulder is provided with Y-shaped padding while thighs are provided with H-shaped padding
- Non-displacement back plate for dorsal D ring
- Stand out lateral D-rings for ease of work

MARKINGS

- Manufacturers Logo, details & mailing address
- Model No., Batch No., Serial No.
- Year of Manufacture
- Material
- Approval & CE marking
- Instruction Pictogram

STORAGE

- Store the harness in a dry area away from ultraviolet rays.
- Do not store in direct / high heat or sunlight as this may distort the Colour.
- Can be stored and transported in their original cartons to avoid corrosion due to atmospheric moisture, excessive heat or cold.

CLEANING

- Use Clean piece of cloth to wipe the dust

PACKING

- 5 pieces per carton

