



VENTINOUT CTF-60
Industrial Blower

STANDARD : **CE**

| INDUSTRY | | IDEAL APPLICATIONS |
|-----------------|-----------------------|--|
| Pharmaceutical | Construction | Confined Space Ventilation |
| Cement | Oil & Gas | Drying and Curing |
| Food & Beverage | General Manufacturing | Underground Ventilation |
| Agrotech | Steel & Power | Equipment, Process & Personnel Cooling |
| Petrochemical | Marine | Welding Fume Exhaust |
| Chemical | Shipbuilding | Exhaust Smoke, Heat and Fire Gases |



VENTINOUT CTF-60 - 24" AXIAL METAL BLOWER

Designed for applications requiring larger amounts of air output, the Standard 24" (600 mm) Axial Blower offers a 3.0 HP motor with an efficient eight-blade impeller in a rugged, lightweight metal housing. Certified to CE

SPECIAL FEATURES



PORTABLE



EASY TO CARRY



HEAVY DUTY



LIGHT WEIGHT

CONSTRUCTION

Complete unit epoxy powder coated in safety orange

16-gauge armour steel sheet housing

Silver metal coated grill for safety

Powered by a 3.0 hp motor

8 blade precision balanced heavy duty aluminium alloy impeller

Motor equipped with thermal switch for overheat protection

Attached duct at either flange for intake or exhaust ventilation

All components are coated for greater wear resistance

Compliance: Certified to CE

| DIAMETER | STYLE | COLOR |
|--------------|------------------------------------|---------------|
| 24" (600 mm) | Axial Fan | Safety Orange |
| MOTOR | VOLTAGE | FREQUENCY |
| 3.0 HP | 240 V | 50 Hz. |
| SPEED | FREE AIR CAPACITY | WEIGHT |
| 1400 RPM | 8475 CFM (240 m ³ /min) | 67.5 kg |

Udyogi



| DIMENSIONS | CERTIFICATIONS |
|--------------------------|----------------|
| 84(L) x 77(W) x 58(H) cm | CE |


| FEATURES |
|---|
| Dynamically designed fan housing to optimizes airflow efficiency |
| Protective guards meeting OSHA standards |
| Impeller is designed for high Static pressure providing higher airflow rate |
| Equipped with four heavy duty locking caster wheels for easy transport |
| Adjustable angle for easy setup |

| STORAGE | CLEANING |
|--|-----------------------------------|
| Store in shadow, dry, room temperature | Clean with soft, dry cotton cloth |

| APPLICATION |
|--|
| Confined space fresh air supply |
| Fume removal (degassing) |
| Process cooling |
| Equipment cooling |
| Source capture fume exhaust |
| Personnel heat stress relief |
| Air curing and drying of paints and coatings |

| ADVANTAGE |
|---|
| Equipment cooling and personnel cooling to increase safety and improve production |
| Reliable fresh air supply in confined spaces for comfort and safety |
| Premium heavy-duty, continuous-operation motor |
| Heavy-duty construction to meet industry demands |

| PACKING |
|---------------------|
| 1 piece in a carton |

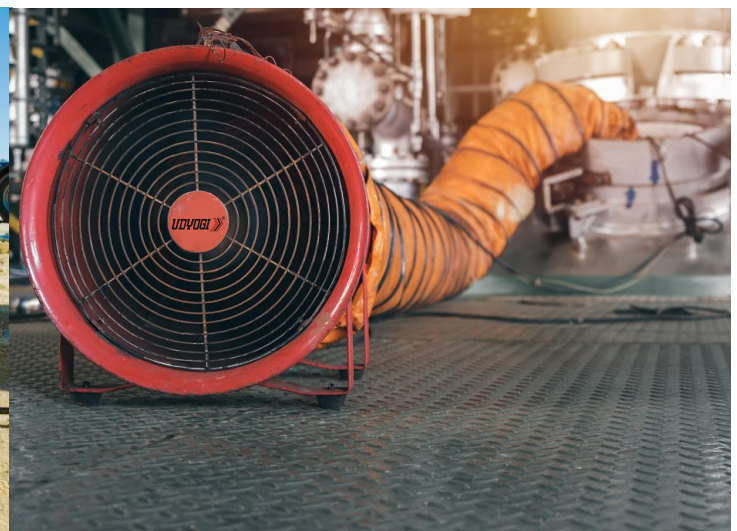

Udyogi