



VENTINOUT FL-30 Industrial Duct

SPECIAL FEATURES









COLOR

STYLE

Safety Orange

Retractable

VENTINOUT FL-30 - FLEXIBLE DUCTING

This product is lightweight, retractable and designed for maximum air handling capabilities. Dual direction flow with minimum friction loss.



CONSTRUCTION

Vinyl and polyester materials

Single-Ply

PVC Coated

Temperature range -20°F to 180°F (-28.8°C to 82.22°C)

Retractable, Non-collapsible design

Class 1 hard drawn spring steel wire helix

Orange Colour with black weather-strip

Fastening cuffs at both ends

Heat sealed seams for smoother surface for better air flow

FEATURES

Quick and easy cinch belt securely fastens duct to blower housings and duct ends

Integral rigid duct end allows easy coupling of duct without the need for separate splicer accessory

Wire supported, non-collapsible

Close-pitched, wire-supported and features smooth interior walls for reduced flow restriction

Retractable for easier, safer storage

Diameter is 12" (300 mm)

Available lengths are 5/10/15 mtrs.; duct can be coupled together for longer runs

STORAGE


Store in shadow, dry, room temperature

CLEANING

Clean with soft, dry cotton cloth

PACKING

1 piece in a carton

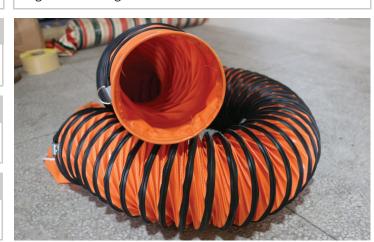

Udyogi

294, B. B. Ganguly Street, 2nd Floor, Kolkata - 700 012 E-mail: info@udyogi.net Website: www.udyogisafety.com Tel.: +91 33 2225 1470/71/72