



RES-PROTEK 8103PR
Organic Vapours & Acid Gases Combined
Twin Filter A1E1 P3 R D

STANDARD : EN 14387:2004+A1:2008

INDUSTRY			
Pharmaceutical	Chemical	Auto-mobile	Heavy Manufacturing
Marine	Transportation	Food & Beverage	Agriculture
Steel	Paper	General Manufacturing	Textile
Oil & Gas	Power	Construction	FMCG



RES-PROTEK 8103PR - Organic Vapours & Acid Gases Combined Twin Filter A1E1 P3 R D(Protection Against Organic Vapours, Acid Gases and Particulate Matter)

Res-protek 8103PR filter is a A1 E1 P3 R D combined type filter designed to provide protection against certain Chlorine, Chlorine Dioxide, Hydrogen Chloride, Hydrogen, Fluoride, Hydrogen Sulfide and organic gases and vapors with a boiling point above 65°C. These may include solvents, hydrocarbons, and other organic compounds, as well as particulate matter (P3).

- Swept-back design allows an enhanced field of view and comfort.
- A wide range of applications reduces inventory needs.
- Simple and quick installation and usage requirements reduce training requirements.

CAPACITY & FILTRATION

A1 filter incorporates activated carbon; it has the capacity to adsorb certain organic gases and vapors before they become saturated and require replacement.

E1 filters have a capacity to adsorb certain inorganic gases and vapors, such as sulfur dioxide (SO₂).

P3 -filters provide high-efficiency protection against particulate matter, including solid and liquid aerosols. These filters offer the highest level of particle filtration, ensuring effective respiratory protection against hazardous particulates.

Reusable (R):The "R" designation indicates that the filter is reusable. The capacity of the filter depends on factors such as the concentration of contaminants in the air and the duration of exposure.

D - Combined filters that meet clogging test. The capacity of the filter depends on factors such as the concentration of contaminants in the air and the duration of exposure.

COMPATIBILITY

8103PR filters are compatible with various types of respiratory protective devices, including the Res-Protek 8200, 9000 half-face mask, and 8800 full-face mask.

FILTER CLASSIFICATION

Filter Type - A E P3 R (OV AG)	P3
Filter Class - 1	R
PPM - up to 1000 ppm	D
Colour Code - Brown Yellow	----

CONNECTION TYPE

Bayonet Connectiont

Secure Attachment: Bayonet connection filters feature a secure and robust attachment mechanism. The bayonet connection ensures a tight seal between the filter and the respirator, minimizing the risk of leakage or dislodgment during use.

Quick and Easy Replacement: Filters with bayonet connections can be swiftly replaced when needed. The bayonet mechanism allows for effortless attachment and removal, reducing downtime and ensuring uninterrupted workflow.

Udyogi



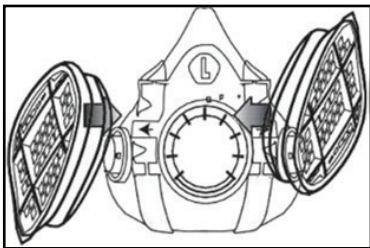
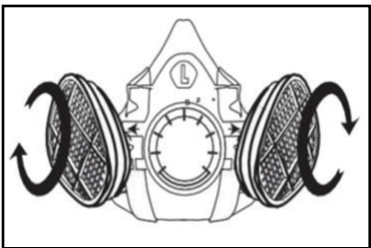
APPLICATION			
Pharmaceutical Processing	Pesticides, Agrochemicals Handling	Oil Processing/ Handling	Paint Preparation
Chemical Processing /Handling/Clean-up	Sealants Processing /Handling	Laboratories	Cosmetic Formulations
General Maintenance, Cleaning, Renovation	Assembly	Machining	Adhesives Processing / Handling
General Industrial Operations	Cleaning and Degreasing	Painting	Food Proceeding

STORAGE	
Filters are supplied in hermetic packaging. Without taking the filter out of its original packaging,	Avoid high levels of humidity, hopefully not over 80% relative humidity.
Keep it in a fresh and dry environment away from atmospheric contaminants.	Do not expose the filter to heat. direct sunlight.
Do not expose the respirator to heat over 50 °C or direct sunlight.	
*Storage under conditions other than those specified by the manufacturer may affect the shelf life.	

PACKING	
1 pair packed in a foil pouch.	30 pairs in one carton box.

ASSEMBLING INSTRUCTIONS FILTER WITH FACE MASK

Match the filter plastic connection with the filter holder on the respirator. Press and turn the filter all the way clockwise. Repeat for second filter

The above mentioned filters when used with half masks, full masks, the negative pressure fit check is necessary before entrance into contaminated area, please see information on half mask, full mask user instruction.

WARNING

These filters do not supply oxygen. Do not use in atmospheres containing less than 19.5% oxygen. Caution must be given in oxygen-enriched atmospheres (ignition), and it is prohibited to enter explosive atmospheres (e.g., through solvents). Filters should not be used in firefighting or to work with open flames or molten metal since. Before use, the wearer must read and understand the User Instructions provided as a part of the product packaging.