




TECHNICAL DATA SHEET

FC 38 Green (Shade 5) Face Shield

Product Introduction:

- Udyogi FC 38 G Face Shield is highly durable and resistant to impacts, providing excellent protection against flying debris and potential hazards in industrial settings.
- Designed to meet **EN 166:2001** standard, which covers requirements for optical quality, mechanical strength, and impact protection.

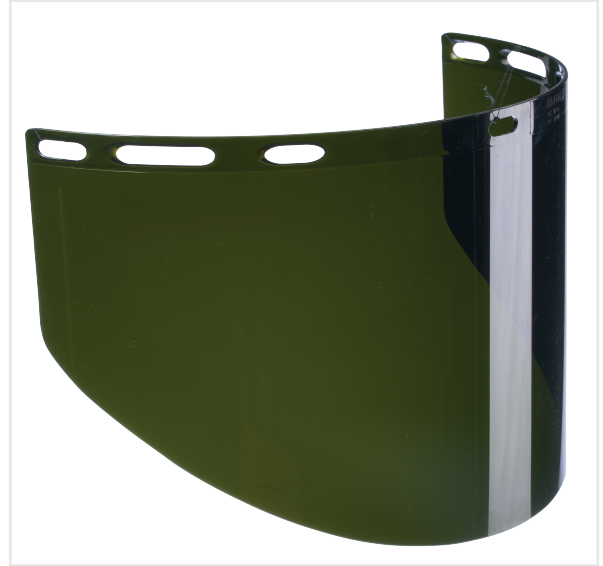

Features:

- These visors are designed to easily attach to standard industrial helmets, ensuring a secure fit and convenient use.
- Polycarbonate masks that extend fully to cover a wearer's face
- Provides wide vision
- Protects against 99.9% UV protection
- Protections against high-speed impact, flame & rays
- Protective pouch (Prevent damages and scratches during transportation)
- Fits over the spec & face mask
- Hard coating on lens ensures that the lens prevents scratches that expands shelf life
- Best optical quality (Highest ranking at the tests of spherical refractive power, astigmatic refractive power, prismatic refractive power, and light diffusion)
- Suitable for different work environments

Benefits:

- **Impact Resistant:** The polycarbonate visor offers excellent resistance to high-velocity impacts, protecting the eyes from flying particles, sparks, and debris in industrial environments.
- **Lightweight:** FC 38 G is very lightweight, making it comfortable for prolonged wear without adding significant weight to the helmet.
- **Recyclable:** polycarbonate is recyclable. After the safety spectacles reach the end of their useful life, they can be recycled, helping to reduce environmental impact.
- **Durability:** The robust construction and weather-resistant properties of the Polycarbonate shell ensure long-lasting performance, even in harsh conditions.

Udyogi



Product Specifications:

Model: FC 38 G – Face Shield
Visor Component: Polycarbonate
Anchoring points: 5
Visor option: Green
Shade: 5
Optical Class: 1
Filter: 2-1.5
Impact Resistance: B (120 m/s)
Coating: K (Hard Coat)
Weight: ___ grams
Size: (9 X 14 1/2) inch (228 mm X 368 mm)
Thickness: 2 mm
Packaging: 70 pcs. per carton
Standard: EN166 :2001, CE

Applications:

- Protects face exposed to welding, furnace, splashes, high speed flying small & medium fragments
- Shields workers from flying rock, dust, debris, cement particles, metal shards, machinery hazards etc.
- Protects the face and eyes from splashes and exposure to harmful substances.
- Maintains high optical clarity and minimizes distortion, ensuring precise visibility during critical tasks.

Industry:

These helmets are utilized for their protective and practical features in various industries such as :



Iron & Steel



Metal Mining




Cement



Chemical



Pharmaceutical



Construction



Textile and Glass



Automobile



Oil & Gas



Marine



Electric Utility



FMCG



Safety Information :

- Avoid Exposure to High Temperatures although polycarbonate is durable, prolonged exposure to extreme heat may affect its integrity.
- Check the face shield regularly for any cracks, scratches, or damage. Replace them if the integrity is compromised to ensure continued protection.
- Clean the visor regularly with a soft, clean cloth to maintain clear vision. For stubborn dirt or chemical residue, use mild soap and water.

Usage Instructions :

- Securely align the face shield's mounting bracket with the helmet's designated attachment points.
- Lock the shield securely onto the helmet.
- Once attached, adjust the face shield to your desired position by moving it up or down.
- Ensure the shield covers your entire face for full protection

Storage :

- Can be stored in the dark for up to 2 years
- Do not store in direct / high heat or sunlight as this may distort the color
- Can be stored and transported in their original cartons at ambient temperature (0° C to +30° C)